



ENVIRONMENTAL PRODUCT DECLARATION

In accordance with EN 15804 and ISO 14025

IXXO

Date of publication: 2015-11-09


Revision date: 2018-11-06

Valid until: 2023-11-05

Based on PCR Construction products and
construction services v2.2 and Sub-PCR-I Thermal
insulation products

Scope of the EPD®: Spain and Portugal

Version: 2

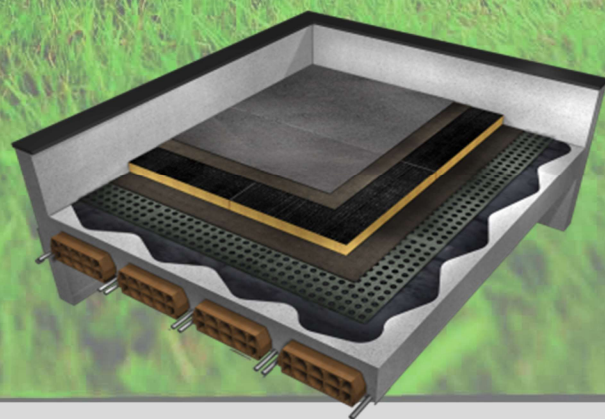

Registration number The International EPD® System: S-P-00766
Reg. number Ecoplatform: ECO EPD 00000254

ISOVER
SAINT-GOBAIN

General information

Manufacturer: Saint Gobain Isover Ibérica SL. Avenida del Vidrio S/N. 19200 Azuqueca de Henares.

Programme used: The International EPD® System. More information at www.environdec.com

EPD® registration number: S-P-00766

Ecoplatform registration number: ECO EPD 00000254

PCR identification: PCR 2012:01 Construction products and construction services v2.2 and Sub-PCR-I Thermal insulation products

Product name and manufacturer represented: Ixxo; Saint Gobain Isover Ibérica SL

Owner of the declaration: Saint Gobain Isover Ibérica SL

EPD® prepared by: Nicolás Bermejo and Alfonso Díez (Saint Gobain Isover Ibérica SL)

Contact: Nicolás Bermejo, Alfonso Díez (Saint Gobain Isover Ibérica). Email: nicolas.bermejo@saint-gobain.com, alfonso.diez@saint-gobain.com

Declaration issued: 2015-11-09, **Valid until:** 2023-11-05

EPD program operator	The International EPD® System. Operated by EPD® International AB. www.environdec.com .
PCR review conducted by	The Technical Committee of the International EPD® System
LCA and EPD® performed by Saint Gobain Isover Ibérica SL	
Independent verification of the environmental declaration and data according to standard EN ISO 14025:2010	
Internal <input type="checkbox"/>	External <input checked="" type="checkbox"/>
Verifier Marcel Gómez Ferrer Marcel Gómez Consultoria Ambiental (www.marcelgomez.com) Tlf 0034 630 64 35 93 Email: info@marcelgomez.com	
www.isover.es	

Product description

Product description and description of use:

This Environmental Product Declaration (EPD®) describes the environmental impacts of 1 m² of mineral wool with a thermal resistance of 1,0 K*m²*W⁻¹.

The production site of Saint Gobain Isover Ibérica SL. in Azuqueca (Spain) uses raw materials of natural origin and abundant (i. e. volcanic rock or silica sand) in order to using fusion and fiberising techniques obtain mineral wool products. The products obtained from mineral wools are characterized by its lightness due to its air containing structure that keeps immobile between its intertwined filaments.

On Earth, the best insulator is dry immobile air. At 10°C its thermal conductivity factor, expressed in λ , is 0.025 W/(m.K) (watts per meter Kelvin degree). The thermal conductivity of mineral wool is close to immobile air, and its lambda value is between 0,030 W/(m.K) for the most efficient wools to 0.044 W/(m.K) to the least efficient ones.

With its entangled structure, glass wool is a porous material that traps the air, making it one of the best insulating materials. The porous and elastic structure of the wool also absorbs noise and knocks,

offers acoustic correction inside of the buildings. Mineral wools contain mainly organic materials, considered incombustible and do not propagate flames.

Isover's mineral wool insulation (Glass wool, Rock wool, etc) is used in buildings as well as industrial facilities. It ensures a high level of comfort, lowers energy costs derived from the use of the housing, minimizes carbon dioxide (CO₂) emissions, prevents heat loss through pitched roofs, walls, floors, pipes and boilers, reduces noise pollution and protects homes and industrial facilities from the risk of fire.

Mineral wool products last for the average building's lifetime (which is often set at 50 years), or as long as the insulated building component is part of the building.

Technical data/physical characteristics:

The thermal conductivity of the mineral wool is: **0,039 W/(m·K)** (UNE EN 12667)

Reaction to fire: **NC**

Acoustic properties: **NC**

Water vapour transmission: **> 5.000 m²·h·Pa/mg** (UNE EN 12086)

Description of the main components and/or materials for 1 m² of mineral wool with a thermal resistance of 1 K.m².W⁻¹ for the calculation of the EPD®:

PARAMETER	VALUE
Quantity of wool for 1 m ² of product	5,85 Kg
Thickness of wool	39 mm
Surfacing	Oxyasphalt
Packaging for the transportation and distribution	Polyethylene Wood pallet Paper for the label
Product used for the Installation	None

During the life cycle of the product any hazardous substance listed in the "Candidate List of Substances of Very High Concern (SVHC) for authorization¹" has been used in a percentage higher than 0,1% of the weight of the product.

In Annex I the results of the environmental performance of the life cycle of the product in the thicknesses of 50 mm, 60 mm, 80 mm, 120 mm and 140 mm are showed.

¹ http://echa.europa.eu/chem_data/authorisation_process/candidate_list_table_en.asp


LCA calculation information

FUNCTIONAL UNIT	Providing a thermal insulation on 1 m ² of product with a thermal resistance of 1 K.m ² .W ⁻¹
SYSTEM BOUNDARIES	Cradle to Grave: Mandatory stages = A1-3, A4-5, B1-7, C1-4. Optional stage = D not taken into account
REFERENCE SERVICE LIFE (RSL)	50 years
CUT-OFF RULES	<p>In the case that there is not enough information, the process energy and materials representing less than 1% of the whole energy and mass used can be excluded (if they do not cause significant impacts). The addition of all the inputs and outputs excluded cannot be bigger than the 5% of the whole mass and energy used, as well of the emissions to environment occurred. Flows related to human activities such as employee transport are excluded.</p> <p>The construction of plants, production of machines and transportation systems are excluded since the related flows are supposed to be negligible compared to the production of the building product when compared at these systems lifetime level.</p>
ALLOCATIONS	Allocation criteria are based on mass
GEOGRAPHICAL COVERAGE AND TIME PERIOD	Spain and Portugal 2014

- “EPDs of construction products may be not comparable if they do not comply with EN 15804”
- “Environmental Product Declarations within the same product category from different programs may not be comparable”

Life cycle stages

Flow diagram of the Life Cycle

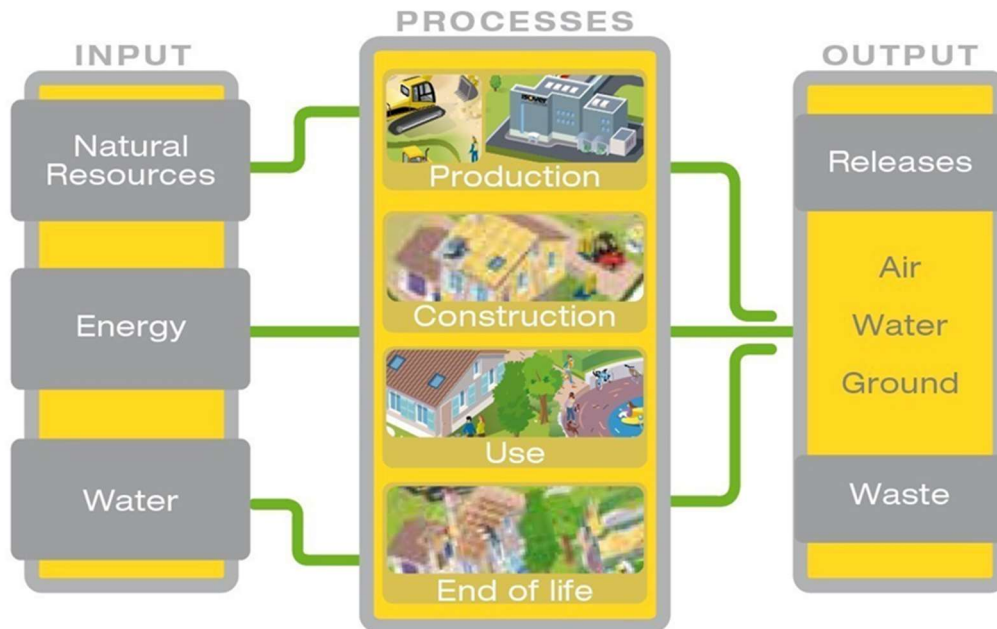

Product stage, A1-A3

Description of the stage: the product stage of the mineral wool products is subdivided into 3 modules A1, A2 and A3 respectively "Raw material supply", "transport" and "manufacturing".

The aggregation of the modules A1, A2 and A3 is a possibility considered by the EN 15 804 standard. This rule is applied in this EPD®.

Description of the scenarios and other additional technical information:

A1, Raw materials supply

This module takes into account the extraction and processing of all raw materials and energy which occur upstream to the studied manufacturing process

Specifically, the raw material supply covers production of binder components and sourcing (quarry) of raw materials for fiber production, e.g. sand and borax for glass wool. Besides these raw materials, recycled materials (agglomerates) are also used as input.


A2, Transport to the manufacturer

The raw materials are transported to the manufacturing site. In our case, the modeling include: road and boat transportations (average values) of each raw material.

A3, Manufacturing

This module includes the manufacturing of the product and packagings. Specifically, it covers the manufacturing of glass, resin, mineral wool (including the processes of fusion and fiberizing showed in the flow diagram), and the packaging.

Rock wool production

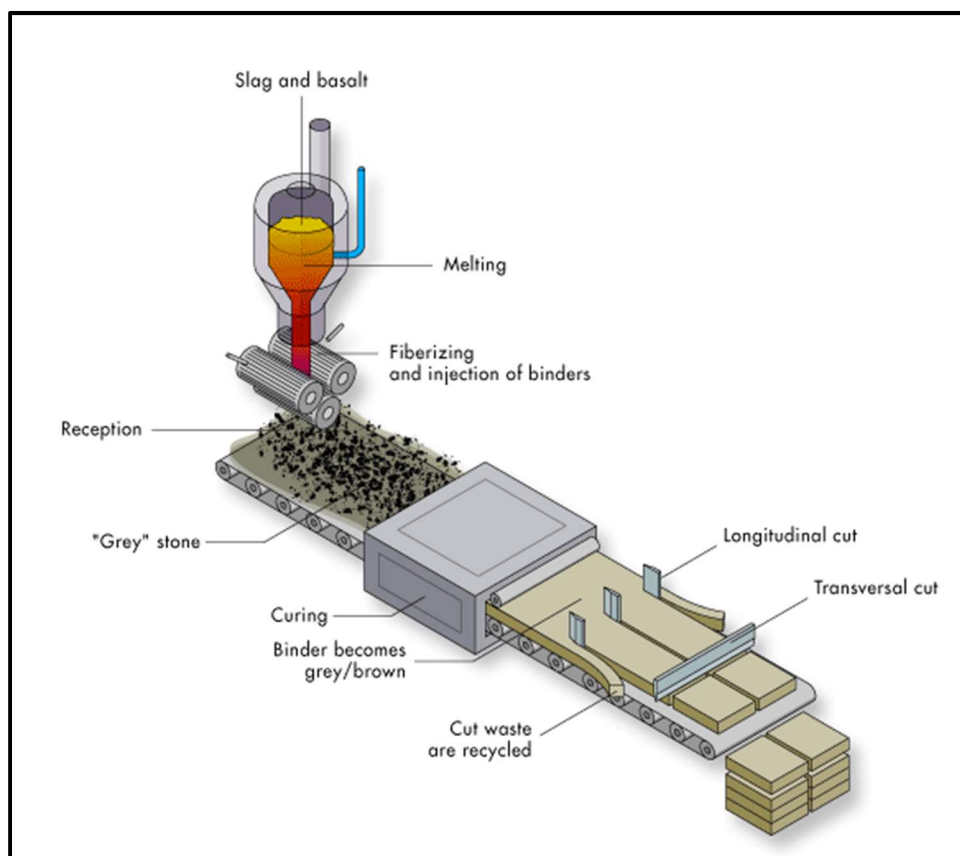

Construction process stage, A4-A5

Description of the stage: the construction process is divided into 2 modules: A4, transport to the building site and A5, installation in the building.

A4, Transport to the building site: this module includes transport from the production gate to the building site.

Transport is calculated on the basis of a scenario with the parameters described in the following table.

PARAMETER	VALUE/DESCRIPTION
Fuel type and consumption of vehicle or vehicle type used for transport e.g. long distance truck, boat, etc.	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km
Distance	450 km
Capacity utilisation (including empty returns)	100 % of the capacity in volume 30 % of empty returns
Bulk density of transported products*	20-200 kg/m ³
Volume capacity utilisation factor	1

**Isover products presents a compression factor between 1 and 4. For an average volume of the truck of 65 m³ and the m2 of product specified in the prices.*

A5, Installation in the building: this module includes:

- Waste produced during the installation of the product (see value in percentage shown in the next table). These losses are sent to landfill (see landfill model for mineral wool at End of life chapter)
- Additional manufacturing processes done in order to compensate losses
- Packaging waste processing, which are 100% collected and recycled

PARAMETER	VALUE/DESCRIPTION
Wastage of materials on the building site before waste processing, generated by the product's installation (specified by type)	5 %
Output materials (specified by type) as results of waste processing at the building site e.g. of collection for recycling, for energy recovering, disposal (specified by route)	Product packaging waste is 100% collected and recycled. Following a conservative methodology mineral wool losses are considered to be landfilled, while they are 100% recyclable and/or reusable.

Use stage (excluding potential savings), B1-B7

Description of the stage: the use stage is divided into the following modules:

- B1: Use
- B2: Maintenance
- B3: Repair
- B4: Replacement
- B5: Refurbishment
- B6: Operational energy use
- B7: Operational water use

Description of the scenarios and additional technical information:

Once installation is complete, no actions or technical operations are required during the use stages until the end of life stage. Therefore mineral wool insulation products have no impact (excluding potential energy savings) on this stage.

End of Life Stage, C1-C4

Description of the stage: this stage includes the next modules:

C1, Deconstruction, demolition

The de-construction and/or dismantling of insulation products take part of the demolition of the entire building. In our case, the environmental impact is assumed to be very small and can be neglected

C2, Transport to waste processing

The model use for the transportation (see A4, transportation to the building site) is applied.

C3, Waste processing for reuse, recovery and/or recycling

The product is considered to be landfilled without reuse, recovery or recycling.

C4, Disposal

The mineral wool is assumed to be 100% landfilled.

Description of the scenarios and additional technical information:

End of life:

PARAMETER	VALUE/DESCRIPTION
Collection process specified by type	6.830 g (collected with mixed construction waste)
Recovery system specified by type	No re-use, recycling or energy recovery
Disposal specified by type	6.830 g landfilled
Assumptions for scenario development (e.g. transportation)	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km
	25 km of average distance to landfill

Reuse/recovery/recycling potential, D

Description of the stage: module D has not been taken into account.

LCA results







LCA model, aggregation of data and environmental impact are calculated from the TEAM™ software 5.2. CML v 4.2 impact method has been used, together with DEAM (2006) and Ecoinvent 2.3 databases to obtain the inventory of generic data.

Raw materials and energy consumption, as well as transport distances have been taken directly from the manufacturing plant of Isover Saint Gobain Spain in 2014.


The tables below summarize in detail the results of the LCA, corresponding to a product thickness of 39 mm. This thickness, although it does not correspond to a real product, corresponds to an $R = 1 \text{ K.m}^2.\text{W}^{-1}$ facilitating in this way the comparison between different insulating materials.

This EPD® includes the next thicknesses: 40 mm, 50 mm, 60 mm, 80 mm, 120 mm and 140 mm. Based in the reference PCR, a reference value has been selected ($R=1 \text{ m}^2.\text{K}$ for a thickness of 40 mm), thickness to which all the results are normalized. In Annex I the environmental performance of the 50 mm, 60 mm, 80 mm, 120 mm and 140 mm thicknesses are showed.






ENVIRONMENTAL IMPACTS 40 MM

Parameters	Product stage	Construction stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Global Warming Potential (GWP) - kg CO2 equiv/FU	6,51E+00	3,01E-01	3,29E-01	0	0	0	0	0	0	0	Irrelevant	2,92E-02	0	1,75E-01	MND ²
The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.															
 Ozone Depletion (ODP) kg CFC 11 equiv/FU	4,23E-07	2,20E-08	2,17E-08	0	0	0	0	0	0	0	Irrelevant	2,05E-09	0	1,33E-08	MND
Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.															
 Acidification potential (AP) kg SO2 equiv/FU	3,90E-02	1,00E-03	1,96E-03	0	0	0	0	0	0	0	Irrelevant	1,15E-04	0	4,03E-04	MND
Acid depositions have negative impacts on natural ecosystems and the man-made environment incl, buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.															
 Eutrophication potential (EP) kg (PO4)3- equiv/FU	7,37E-03	2,40E-04	3,71E-04	0	0	0	0	0	0	0	Irrelevant	2,77E-05	0	7,06E-03	MND
Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.															
 Photochemical ozone creation (POPC) Ethene equiv/FU	2,09E-03	4,31E-05	1,05E-04	0	0	0	0	0	0	0	Irrelevant	3,87E-06	0	3,89E-05	MND
Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.															
 Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU	7,10E-06	9,48E-07	3,55E-07	0	0	0	0	0	0	0	Irrelevant	7,42E-08	0	1,74E-08	MND




² MND=Module Not Declared




 Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU	1,12E+02	4,62E+00	5,61E+00	0	0	0	0	0	0	0	Irrelevant	4,33E-01	0	3,12E-01	MND
	Consumption of non-renewable resources, thereby lowering their availability for future generations.														

RESOURCE USE 40 MM





Parameters	Product stage	Construction process stage	Use stage								End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU	7,80E+00	2,15E-03	3,80E-01	0	0	0	0	0	0	0	Irrelevant	1,22E-04	0	0	MND
 Use of renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	Irrelevant	-	-	-	-
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU	7,80E+00	2,15E-03	3,80E-01	0	0	0	0	0	0	0	Irrelevant	1,22E-04	0	0	MND
 Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials - MJ/FU	1,12E+02	4,62E+00	5,61E+00	0	0	0	0	0	0	0	Irrelevant	4,33E-01	0	3,12E-01	MND
 Use of non-renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU	1,12E+02	3,85E+00	4,34E+00	0	0	0	0	0	0	0	Irrelevant	2,15E-01	0	0	MND
 Use of secondary material kg/FU	6,34E-01	0	3,12E-02	0	0	0	0	0	0	0	0	0	0	0	MND

WASTE CATEGORIES 40 MM

Parameters		Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
	Use of renewable secondary fuels- MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Use of non-renewable secondary fuels - MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Use of net fresh water - m3/FU	7,00E-03	6,00E-05	3,45E-04	0	0	0	0	0	0	0	0	1,55E-05	0	0	MND

	Hazardous waste disposed <i>kg/FU</i>	2,10E-03	8,78E-05	7,32E-05	0	0	0	0	0	0	0	Irrelevant	4,87E-06	0	0	MND
	Non-hazardous waste disposed <i>kg/FU</i>	1,61E+00	3,32E-04	7,32E-01	0	0	0	0	0	0	0	Irrelevant	1,85E-05	0	6,92E+00	MND
	Radioactive waste disposed <i>kg/FU</i>	5,85E-04	6,34E-05	1,02E-05	0	0	0	0	0	0	0	Irrelevant	3,41E-06	0	0	MND


OTHER OUTPUT FLOWS 40 MM

Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Components for re-use <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Materials for recycling <i>kg/FU</i>	1,22E+00	1,56E-06	1,32E-01	0	0	0	0	0	0	0	Irrelevant	8,78E-08	0	0	MND
 Materials for energy recovery <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Exported energy <i>MJ/FU</i>	0	0	0	0	0	0	0	0	0	0	Irrelevant	0	0	0	MND

LCA interpretation

The Product stage (A1-A3) is the life cycle stage with the biggest impact, since it represents more than 90% of the whole impact of the product for the next impact categories: Global warming, Non-renewable resources consumption, energy and water consumption.

Waste production is mainly produced during the End of life stage (75% of the whole impact). This is due to the fact that 100% of the product is landfilled at the end of its service life.

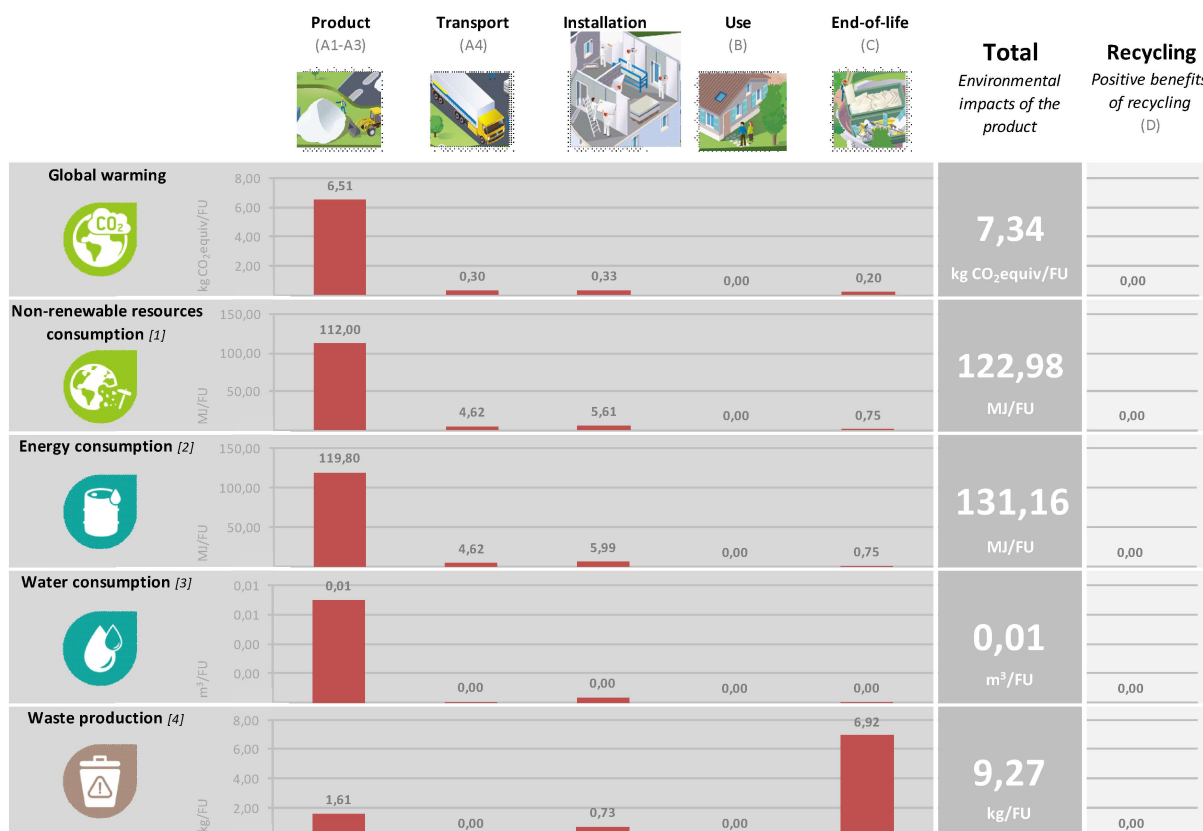

[1] This indicator corresponds to the abiotic depletion potential of fossil resources.

[2] This indicator corresponds to the total use of primary energy.


[3] This indicator corresponds to the use of net fresh water.

[4] This indicator corresponds to the sum of hazardous, non-hazardous and radioactive waste disposed.

Additional information

The electricity production mix considered for A1-A3 product stage is the Spanish electricity production mix in 2013³.

The composition of the electricity production mix used is detailed in the next figure.

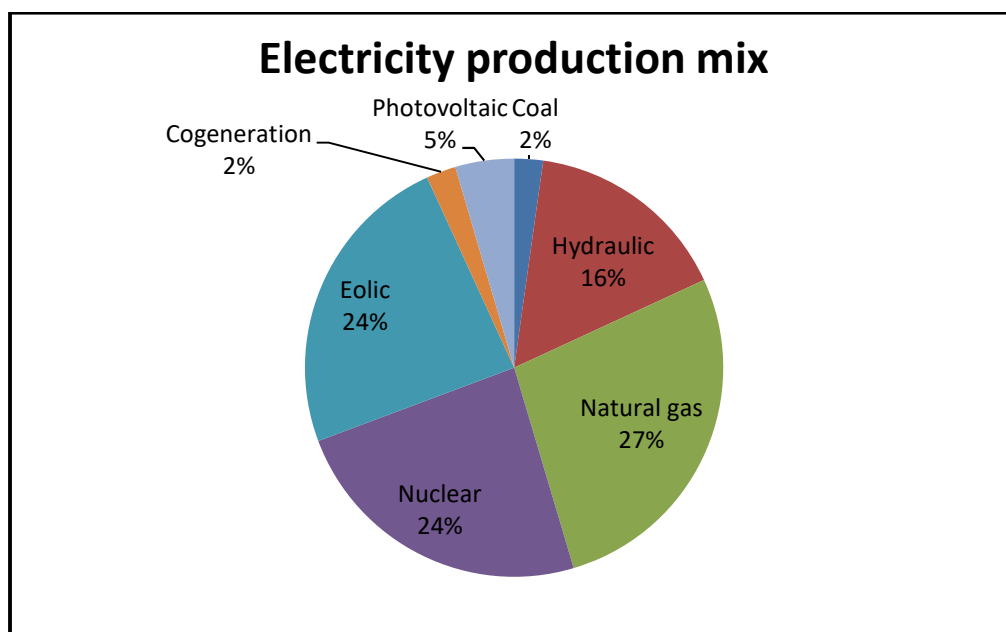

EPD[®] modifications regarding the previous version

- The present EPD[®] has been adapted to the requirements indicated in the Sub-PCR-I Thermal insulation products.
- The conversion table to the impact of the different thicknesses of the product has been moved to Annex I
- An explanation of the table indicated in the previous point has been introduced, as well as an explanation about the fact that the thickness corresponding to the Functional Unit (with $R = 1 \text{ K.m}^2.\text{W}^{-1}$) does not correspond to a commercially sold thickness (FU used in order to facilitate the comparison between different types of insulation).

³ Source: Red Eléctrica Española.

Bibliography

- ISO 14040:2006: Environmental Management-Life Cycle Assessment-Principles and framework.
- ISO 14044:2006: Environmental Management-Life Cycle Assessment-Requirements and guidelines.
- ISO 14025:2006: Environmental labels and declarations-Type III Environmental Declarations-Principles and procedures.
- PCR 2012:01 Construction products and construction services version 2.2 and Sub-PCR-I Thermal insulation products.
- UNE-EN 15804:2012: Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products.
- General Programme Instructions for the International EPD® System, version 3.0.
- UNE_EN 12667;2002: Thermal performance of building materials and products. Determination of thermal resistance by means of guarded hot plate and heat flow meter methods. Products of high and medium thermal resistance.
- UNE EN 13501-1; 2010: Fire classification of construction products and building elements - Part 1: Classification using data from reaction to fire tests.
- UNE-EN ISO 354;2004: Acoustics - Measurement of sound absorption in a reverberation room.
- UNE EN 12086;1998: Productos aislantes térmicos para aplicaciones en la edificación. Determinación de las propiedades de transmisión del vapor de agua.
- UNE-EN 15978:2012 Sostenibilidad en la construcción. Evaluación del comportamiento ambiental de los edificios. Método de cálculo.

Annex I

This Annex shows the results of the environmental performance of the life cycle of the next thicknesses of the product: 50 mm, 60 mm, 80 mm, 120 mm and 140 mm. The same hypothesis and limits of the system that 40 mm thickness have been taken.

Description of the main components and/or materials for 1 m² of mineral wool for the calculation of the EPD®:

PARAMETER	Thickness				
	50 mm	60 mm	80 mm	120 mm	140 mm
Quantity of wool for 1 m ² of product	7,50 Kg	9,00 Kg	12,00 Kg	18,00 Kg	21,00 Kg
Thickness of wool	50 mm	60 mm	80 mm	120 mm	140 mm
Surfacing	Oxyasphalt	Oxyasphalt	Oxyasphalt	Oxyasphalt	Oxyasphalt
Packaging for the transportation and distribution	Polyethylene Wood pallet Paper for the label	Polyethylene Wood pallet Paper for the label	Polyethylene Wood pallet Paper for the label	Polyethylene Wood pallet Paper for the label	Polyethylene Wood pallet Paper for the label
Product used for the Installation	None	None	None	None	None







Description of the scenarios and additional technical information:

End of life:


PARAMETER	Thickness				
	50 mm	60 mm	80 mm	120 mm	140 mm
Collection process specified by type	8.910 g (collected with mixed construction waste)	10.450 g (collected with mixed construction waste)	13.536 g (collected with mixed construction waste)	19.704 g (collected with mixed construction waste)	22.788 g (collected with mixed construction waste)
Recovery system specified by type	No re-use, recycling or energy recovery	No re-use, recycling or energy recovery	No re-use, recycling or energy recovery	No re-use, recycling or energy recovery	No re-use, recycling or energy recovery
Disposal specified by type	8.910 g to landfill	10.450 g to landfill	13.536 g to landfill	19.704 g to landfill	22.788 g to landfill
Assumptions for scenario development (e.g. transportation)	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km	Average truck trailer with a 24t payload, diesel consumption 38 liters for 100 km
	25 km of average distance to landfill	25 km of average distance to landfill	25 km of average distance to landfill	25 km of average distance to landfill	25 km of average distance to landfill

IXXO 50 MM






ENVIRONMENTAL IMPACTS 50 MM

Parameters	Product stage	Construction stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Global Warming Potential (GWP) - kg CO2 equiv/FU	7,90E+00	3,76E-01	3,99E-01	0	0	0	0	0	0	0	Irrelevant	3,72E-02	0	1,89E-01	MND ⁴
The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.															
 Ozone Depletion (ODP) kg CFC 11 equiv/FU	4,92E-07	2,75E-08	2,52E-08	0	0	0	0	0	0	0	Irrelevant	2,61E-09	0	1,73E-08	MND
Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.															
 Acidification potential (AP) kg SO2 equiv/FU	4,75E-02	1,25E-03	2,38E-03	0	0	0	0	0	0	0	Irrelevant	1,46E-04	0	4,82E-04	MND
Acid depositions have negative impacts on natural ecosystems and the man-made environment incl, buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.															
 Eutrophication potential (EP) kg (PO4)3- equiv/FU	8,92E-03	3,01E-04	4,49E-04	0	0	0	0	0	0	0	Irrelevant	3,53E-05	0	7,08E-03	MND
Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.															
 Photochemical ozone creation (POPC) Ethene equiv/FU	2,49E-03	5,39E-05	1,25E-04	0	0	0	0	0	0	0	Irrelevant	4,93E-06	0	4,18E-05	MND
Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.															
 Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU	8,36E-06	1,19E-06	4,18E-07	0	0	0	0	0	0	0	Irrelevant	9,46E-08	0	1,74E-08	MND




⁴ MND=Module Not Declared




 Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU	1,31E+02	5,77E+00	6,56E+00	0	0	0	0	0	0	0	Irrelevant	5,51E-01	0	3,12E-01	MND
	Consumption of non-renewable resources, thereby lowering their availability for future generations.														

RESOURCE USE 50 MM





MMParameters	Product stage	Construction process stage	Use stage								End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU	9,98E+00	2,75E-03	4,86E-01	0	0	0	0	0	0	0	Irrelevant	1,56E-04	0	0	MND
 Use of renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	Irrelevant	-	-	-	-
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU	7,80E+00	2,15E-03	3,80E-01	0	0	0	0	0	0	0	Irrelevant	1,22E-04	0	0	MND
 Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials - MJ/FU	1,31E+02	5,77E+00	6,56E+00	0	0	0	0	0	0	0	Irrelevant	5,51E-01	0	3,12E-01	MND
 Use of non-renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU	1,31E+02	5,77E+00	6,56E+00	0	0	0	0	0	0	0	Irrelevant	5,51E-01	0	3,12E-01	MND
 Use of secondary material kg/FU	8,12E-01	0	3,99E-02	0	0	0	0	0	0	0	0	0	0	0	MND

WASTE CATEGORIES 50 MM

Parameters		Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
	Use of renewable secondary fuels- MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Use of non-renewable secondary fuels - MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Use of net fresh water - m3/FU	8,96E-03	7,68E-05	4,42E-04	0	0	0	0	0	0	0	0	1,98E-05	0	0	MND







	Hazardous waste disposed <i>kg/FU</i>	8,93E-05	7,13E-06	4,52E-06	0	0	0	0	0	0	0	Irrelevante	6,50E-07	0	9,20E-07	MND
	Non-hazardous waste disposed <i>kg/FU</i>	5,87E-01	4,60E-01	2,97E-02	0	0	0	0	0	0	0	Irrelevante	3,21E-02	0	8,70E+00	MND
	Radioactive waste disposed <i>kg/FU</i>	4,26E-04	3,36E-05	2,14E-05	0	0	0	0	0	0	0	Irrelevante	3,20E-06	0	2,34E-06	MND

OTHER OUTPUT FLOWS 50 MM


Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Components for re-use <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Materials for recycling <i>kg/FU</i>	1,22E+00	1,56E-06	1,32E-01	0	0	0	0	0	0	0	Irrelevant	8,78E-08	0	0	MND
 Materials for energy recovery <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Exported energy <i>MJ/FU</i>	0	0	0	0	0	0	0	0	0	0	Irrelevant	0	0	0	MND

IXXO 60 MM






ENVIRONMENTAL IMPACTS 60 MM

Parameters	Product stage	Construction stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Global Warming Potential (GWP) - kg CO2 equiv/FU	9,29E+00	4,51E-01	4,68E-01	0	0	0	0	0	0	0	Irrelevant	4,47E-02	0	2,01E-01	MND ⁵
The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.															
 Ozone Depletion (ODP) kg CFC 11 equiv/FU	5,61E-07	3,30E-08	2,86E-08	0	0	0	0	0	0	0	Irrelevant	3,13E-09	0	2,10E-08	MND
Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.															
 Acidification potential (AP) kg SO2 equiv/FU	5,60E-02	1,50E-03	2,81E-03	0	0	0	0	0	0	0	Irrelevant	1,76E-04	0	5,56E-04	MND
Acid depositions have negative impacts on natural ecosystems and the man-made environment incl, buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.															
 Eutrophication potential (EP) kg (PO4)3- equiv/FU	1,05E-02	3,61E-04	5,26E-04	0	0	0	0	0	0	0	Irrelevant	4,24E-05	0	7,10E-03	MND
Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.															
 Photochemical ozone creation (POPC) Ethene equiv/FU	2,90E-03	6,47E-05	1,45E-04	0	0	0	0	0	0	0	Irrelevant	5,92E-06	0	4,46E-05	MND
Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.															
 Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU	9,61-06	1,42E-06	4,81E-07	0	0	0	0	0	0	0	Irrelevant	1,14E-07	0	1,74E-08	MND

⁵ MND=Module Not Declared




 Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU	1,50E+02	6,93E+00	7,50E+00	0	0	0	0	0	0	0	Irrelevant	6,62E-01	0	3,12E-01	MND
	Consumption of non-renewable resources, thereby lowering their availability for future generations.														




RESOURCE USE 60 MM

Parameters	Product stage	Construction process stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU	1,20E+01	3,30E-03	5,83E-01	0	0	0	0	0	0	0	Irrelevant	1,87E-04	0	0	MND
 Use of renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	Irrelevant	-	-	-	-
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU	1,20E+01	3,30E-03	5,83E-01	0	0	0	0	0	0	0	Irrelevant	1,87E-04	0	0	MND
 Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials - MJ/FU	1,50E+02	6,93E+00	7,50E+00	0	0	0	0	0	0	0	Irrelevant	6,62E-01	0	3,12E-01	MND
 Use of non-renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU	1,50E+02	6,93E+00	7,50E+00	0	0	0	0	0	0	0	Irrelevant	6,62E-01	0	3,12E-01	MND
 Use of secondary material kg/FU	9,74E-01	0	4,79E-02	0	0	0	0	0	0	0	0	0	0	0	MND





WASTE CATEGORIES 60 MM

Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	

	Use of renewable secondary fuels- MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Use of non-renewable secondary fuels - MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Use of net fresh water - m3/FU	1,08E-02	9,22E-05	5,30E-04	0	0	0	0	0	0	0	2,38E-05	0	0	MND







	Hazardous waste disposed <i>kg/FU</i>	1,01E-04	8,56E-06	5,12E-06	0	0	0	0	0	0	0	Irrelevant	7,80E-07	0	1,05E-06	MND
	Non-hazardous waste disposed <i>kg/FU</i>	6,90E-01	5,53E-01	3,41E-02	0	0	0	0	0	0	0	Irrelevant	3,87E-02	0	1,04E+01	MND
	Radioactive waste disposed <i>kg/FU</i>	4,80E-04	4,04E-05	2,41E-05	0	0	0	0	0	0	0	Irrelevant	3,84E-06	0	2,49E-06	MND

OTHER OUTPUT FLOWS 60 MM


Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Components for re-use kg/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Materials for recycling kg/FU	1,46E+00	1,87E-06	1,58E-01	0	0	0	0	0	0	0	Irrelevant	1,05E-07	0	0	MND
 Materials for energy recovery kg/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Exported energy MJ/FU	0	0	0	0	0	0	0	0	0	0	Irrelevant	0	0	0	MND

IXXO 80 MM






ENVIRONMENTAL IMPACTS 80 MM




Parameters	Product stage	Construction stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Global Warming Potential (GWP) - kg CO2 equiv/FU	1,21E+01	6,02E-01	6,07E-01	0	0	0	0	0	0	0	Irrelevant	5,79E-02	0	2,23E-01	MND ⁶
The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.															
 Ozone Depletion (ODP) kg CFC 11 equiv/FU	6,98E-07	4,40E-08	3,54E-08	0	0	0	0	0	0	0	Irrelevant	4,05E-09	0	2,76E-08	MND
Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.															
 Acidification potential (AP) kg SO2 equiv/FU	7,29E-02	2,00E-03	3,66E-03	0	0	0	0	0	0	0	Irrelevant	2,28E-04	0	6,86E-04	MND
Acid depositions have negative impacts on natural ecosystems and the man-made environment incl, buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.															
 Eutrophication potential (EP) kg (PO4)3- equiv/FU	1,35E-02	4,81E-04	6,80E-04	0	0	0	0	0	0	0	Irrelevant	5,49E-05	0	7,13E-03	MND
Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.															
 Photochemical ozone creation (POPC) Ethene equiv/FU	3,71E-03	8,62E-05	1,86E-04	0	0	0	0	0	0	0	Irrelevant	7,67E-06	0	4,94E-05	MND
Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.															
 Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU	1,21E-05	1,90E-06	6,06E-07	0	0	0	0	0	0	0	Irrelevant	1,47E-07	0	1,74E-08	MND




⁶ MND=Module Not Declared

 Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU	1,88E+02	9,24E+00	9,39E+00	0	0	0	0	0	0	0	Irrelevant	8,58E-01	0	3,12E-01	MND
	Consumption of non-renewable resources, thereby lowering their availability for future generations.														





RESOURCE USE 80 MM

Parameters	Product stage	Construction process stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU	1,60E+01	4,40E-03	7,77E-01	0	0	0	0	0	0	0	Irrelevant	2,49E-04	0	0	MND
 Use of renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	Irrelevant	-	-	-	-
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU	1,60E+01	4,40E-03	7,77E-01	0	0	0	0	0	0	0	Irrelevant	2,49E-04	0	0	MND
 Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials - MJ/FU	1,88E+02	9,24E+00	9,39E+00	0	0	0	0	0	0	0	Irrelevant	8,58E-01	0	3,12E-01	MND
 Use of non-renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU	1,88E+02	9,24E+00	9,39E+00	0	0	0	0	0	0	0	Irrelevant	8,58E-01	0	3,12E-01	MND
 Use of secondary material kg/FU	1,30E+00	0	6,39E-02	0	0	0	0	0	0	0	0	0	0	0	MND








WASTE CATEGORIES 80 MM															
Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Use of renewable secondary fuels- <i>MJ/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
 Use of non-renewable secondary fuels - <i>MJ/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
 Use of net fresh water - <i>m3/FU</i>	1,44E-02	1,23E-04	7,07E-04	0	0	0	0	0	0	0	0	3,17E-05	0	0	MND

	Hazardous waste disposed <i>kg/FU</i>	1,25E-04	1,14E-05	6,32E-06	0	0	0	0	0	0	0	Irrelevant	1,01E-06	0	1,27E-06	MND
	Non-hazardous waste disposed <i>kg/FU</i>	8,94E-01	7,38E-01	4,42E-02	0	0	0	0	0	0	0	Irrelevant	5,00E-02	0	1,35E+01	MND
	Radioactive waste disposed <i>kg/FU</i>	5,89E-04	5,38E-05	2,95E-05	0	0	0	0	0	0	0	Irrelevant	4,97E-06	0	2,77E-06	MND

OTHER OUTPUT FLOWS 80 MM








Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Components for re-use <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Materials for recycling <i>kg/FU</i>	1,95E+00	2,49E-06	2,11E-01	0	0	0	0	0	0	0	Irrelevant	1,40E-07	0	0	MND
 Materials for energy recovery <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Exported energy <i>MJ/FU</i>	0	0	0	0	0	0	0	0	0	0	Irrelevant	0	0	0	MND

IXXO 120 MM


ENVIRONMENTAL IMPACTS 120 MM															
Parameters	Product stage	Construction stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Global Warming Potential (GWP) - kg CO2 equiv/FU	1,76E+01	9,03E-01	8,86E-01	0	0	0	0	0	0	0	Irrelevant	8,43E-02	0	2,67E-01	MND ⁷
	The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.														
 Ozone Depletion (ODP) kg CFC 11 equiv/FU	9,72E-07	6,59E-08	4,94E-08	0	0	0	0	0	0	0	Irrelevant	5,90E-09	0	4,07E-08	MND
	Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.														
 Acidification potential (AP) kg SO2 equiv/FU	1,07E-01	3,00E-03	5,36E-03	0	0	0	0	0	0	0	Irrelevant	3,31E-04	0	9,46E-04	MND
	Acid depositions have negative impacts on natural ecosystems and the man-made environment incl, buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.														
 Eutrophication potential (EP) kg (PO4)3- equiv/FU	1,97E-02	7,21E-04	9,90E-04	0	0	0	0	0	0	0	Irrelevant	7,99E-05	0	7,19E-03	MND
	Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.														
 Photochemical ozone creation (POPC) Ethene equiv/FU	5,33E-03	1,29E-04	2,67E-04	0	0	0	0	0	0	0	Irrelevant	1,12E-05	0	5,89E-05	MND
	Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.														
 Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU	1,71E-05	2,85E-06	8,57E-07	0	0	0	0	0	0	0	Irrelevant	2,14E-07	0	1,74E-08	MND
 Abiotic depletion potential for fossil resources (ADP-fossil)	2,64E+02	1,39E+01	1,32E+01	0	0	0	0	0	0	0	Irrelevant	1,25E+00	0	3,12E-01	MND

⁷ MND=Module Not Declared



fuels) - MJ/FU	Consumption of non-renewable resources, thereby lowering their availability for future generations.
----------------	---

RESOURCE USE 120 MM															
Parameters	Product stage	Construction process stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU	2,40E+01	6,60E-03	1,17E+00	0	0	0	0	0	0	0	Irrelevant	3,74E-04	0	0	MND
 Use of renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	Irrelevant	-	-	-	-
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU	2,40E+01	6,60E-03	1,17E+00	0	0	0	0	0	0	0	Irrelevant	3,74E-04	0	0	MND
 Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials - MJ/FU	2,64E+02	1,39E+01	1,32E+01	0	0	0	0	0	0	0	Irrelevant	1,25E+00	0	3,12E-01	MND
 Use of non-renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU	2,64E+02	1,39E+01	1,32E+01	0	0	0	0	0	0	0	Irrelevant	1,25E+00	0	3,12E-01	MND
 Use of secondary material kg/FU	1,95E+00	0	8,31E-02	0	0	0	0	0	0	0	0	0	0	0	MND
 Use of renewable secondary fuels- MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
 Use of non-renewable secondary fuels - MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-





WASTE CATEGORIES 120 MM

Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Hazardous waste disposed <i>kg/FU</i>	1,73E-04	1,71E-05	8,75E-06	0	0	0	0	0	0	0	Irrelevant	1,47E-06	0	1,72E-06	MND

 Use of net fresh water - <i>m3/FU</i>	2,16E-02	1,85E-04	1,06E-03	0	0	0	0	0	0	0	0	4,76E-05	0	0	MND
--	----------	----------	----------	---	---	---	---	---	---	---	---	----------	---	---	-----








	Non-hazardous waste disposed <i>kg/FU</i>	1,30E+00	1,11E+00	6,45E-02	0	0	0	0	0	0	0	Irrelevant	7,29E-02	0	1,97E+01	MND
	Radioactive waste disposed <i>kg/FU</i>	8,06E-04	8,07E-05	4,04E-05	0	0	0	0	0	0	0	Irrelevant	7,24E-06	0	3,33E-06	MND

OTHER OUTPUT FLOWS 120 MM

Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Components for re-use <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Materials for recycling <i>kg/FU</i>	2,93E+00	3,74E-06	3,17E-01	0	0	0	0	0	0	0	Irrelevant	2,10E-07	0	0	MND
 Materials for energy recovery <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Exported energy <i>MJ/FU</i>	0	0	0	0	0	0	0	0	0	0	Irrelevant	0	0	0	MND








IXXO 140 MM

ENVIRONMENTAL IMPACTS 140 MM


Parameters	Product stage	Construction stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Global Warming Potential (GWP) - <i>kg CO2 equiv/FU</i>	2,04E+01	1,05E+00	1,03E+00	0	0	0	0	0	0	0	Irrelevant	9,74E-02	0	2,89E-01	MND ⁸
	The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas, carbon dioxide, which is assigned a value of 1.														
 Ozone Depletion (ODP) <i>kg CFC 11 equiv/FU</i>	1,11E-06	7,69E-08	5,64E-08	0	0	0	0	0	0	0	Irrelevant	6,82E-09	0	4,73E-08	MND
	Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules.														
 Acidification potential (AP) <i>kg SO2 equiv/FU</i>	1,24E-01	3,50E-03	6,21E-03	0	0	0	0	0	0	0	Irrelevant	3,83E-04	0	1,08E-03	MND
	Acid depositions have negative impacts on natural ecosystems and the man-made environment incl. buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.														
 Eutrophication potential (EP) <i>kg (PO4)3- equiv/FU</i>	2,28E-02	8,42E-04	1,15E-03	0	0	0	0	0	0	0	Irrelevant	9,24E-05	0	7,22E-03	MND
	Excessive enrichment of waters and continental surfaces with nutrients, and the associated adverse biological effects.														
 Photochemical ozone creation (POPC) <i>Ethene equiv/FU</i>	6,15E-03	1,51E-04	3,08E-04	0	0	0	0	0	0	0	Irrelevant	1,29E-05	0	6,37E-05	MND
	Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.														
 Abiotic depletion potential for non-fossil resources (ADP-elements) - <i>kg Sb equiv/FU</i>	1,96E-05	3,32E-06	9,82E-07	0	0	0	0	0	0	0	Irrelevant	2,48E-07	0	1,74E-08	MND
 Abiotic depletion potential for fossil resources (ADP-fossil fuels) - <i>MJ/FU</i>	3,01E+02	1,62E+01	1,51E+01	0	0	0	0	0	0	0	Irrelevant	1,44E+00	0	3,13E-01	MND
	Consumption of non-renewable resources, thereby lowering their availability for future generations.														

⁸ MND=Module Not Declared



RESOURCE USE 140 MM

Parameters	Product stage	Construction process stage		Use stage							End of life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU	2,80+01	7,70E-03	1,37E+00	0	0	0	0	0	0	0	Irrelevant	4,38E-04	0	0	MND
 Use of renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	Irrelevant	-	-	-	-
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU	2,80+01	7,70E-03	1,37E+00	0	0	0	0	0	0	0	Irrelevant	4,38E-04	0	0	MND
 Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials - MJ/FU	3,01E+02	1,62E+01	1,51E+01	0	0	0	0	0	0	0	Irrelevant	1,44E+00	0	3,13E-01	MND
 Use of non-renewable primary energy used as raw materials MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU	3,01E+02	1,62E+01	1,51E+01	0	0	0	0	0	0	0	Irrelevant	1,44E+00	0	3,13E-01	MND
 Use of secondary material kg/FU	2,28E+00	0	9,72E-02	0	0	0	0	0	0	0	0	0	0	0	MND
 Use of renewable secondary fuels- MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
 Use of non-renewable secondary fuels - MJ/FU	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-





WASTE CATEGORIES 140 MM

Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Hazardous waste disposed <i>kg/FU</i>	1,98E-04	2,00E-05	9,97E-06	0	0	0	0	0	0	0	Irrelevant	1,70E-06	0	1,94E-06	MND

 Use of net fresh water - <i>m3/FU</i>	2,53E-02	2,16E-04	1,24E-03	0	0	0	0	0	0	0	0	5,57E-05	0	0	MND
--	----------	----------	----------	---	---	---	---	---	---	---	---	----------	---	---	-----

	Non-hazardous waste disposed <i>kg/FU</i>	1,351E+00	1,29E+00	7,47E-02	0	0	0	0	0	0	0	Irrelevant	8,42E-02	0	2,28E+01	MND
	Radioactive waste disposed <i>kg/FU</i>	9,14E-04	9,42E-05	4,58E-05	0	0	0	0	0	0	0	Irrelevant	8,37E-06	0	3,60E-06	MND

OTHER OUTPUT FLOWS 140 MM

Parameters	Product stage	Construction process stage		Use stage							End-of-life stage				D Reuse, recovery, recycling
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	
 Components for re-use <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Materials for recycling <i>kg/FU</i>	1,43E+00	1,83E-06	1,54E-01	0	0	0	0	0	0	0	Irrelevant	1,03E-07	0	0	MND
 Materials for energy recovery <i>kg/FU</i>	-	-	-	-	-	-	-	-	-	-	-	-	-	-	MND
 Exported energy <i>MJ/FU</i>	0	0	0	0	0	0	0	0	0	0	Irrelevant	0	0	0	MND

